


Fuse Link Type K OPEN LINK 11kV / 38kV

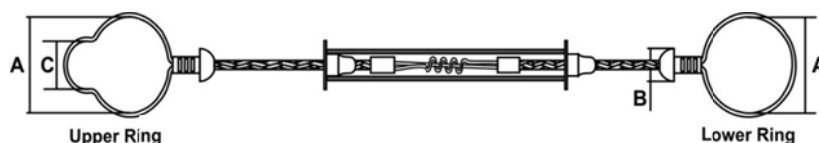

Illustrative

1. Application	Products for Electric Energy Protection	
2. Standard	ANSI C37-41; ANSI C37-42	
3. Nominal current	1A; 2A; 3A; 5A; 6A; 8A; 10A; 12A; 15A; 20A; 25A; 30A; 40A; 50A	
4. Type and speed	K	
5. Voltage rate	11kV/38kV	
6. Upper ring	Diameter (A)	34,0 ± 3,0 mm
	Diameter (C)	17,0 ± 0,5 mm
7. Lower ring	Diameter (A)	34,0 ± 3,0 mm
8. Protector tube	Length	120,0 ± 1,0 mm
	Material	Vulcanized fiber reinforced with fiberglass
9. Flexible cable	Diameter	Maximum 5,0 mm
	Material	Tinned copper wires
10. Overall length	From 205 mm (8") to 350 mm (14")	
11. Quality	Quality management system certified	
	ISO 9001:2008 SGS Certification	
	Breaking capacity essays	CEPEL/POWERTECH
	Standard type essays	INDEL laboratories
12. Packing	Standard routine essays	
	INDEL laboratories	
	Individual	Sealed plastic bag or Paper box
	Collective	Carton box